



Directing our energies for you.

High Performance RF Cables




- Suitable for Outdoor Installation
- Extremely low VSWR (1.07:1)
- Copper Corrugated Cables
- Sealed Against Water Migration
100% PIM tested (-155 dBc max at 2x20w)
- 1/2" Superflex Type Jumper
- Quality Assurance - ISO 9001

- Manufactured by SPINNER GmbH



Directing our energies for you.

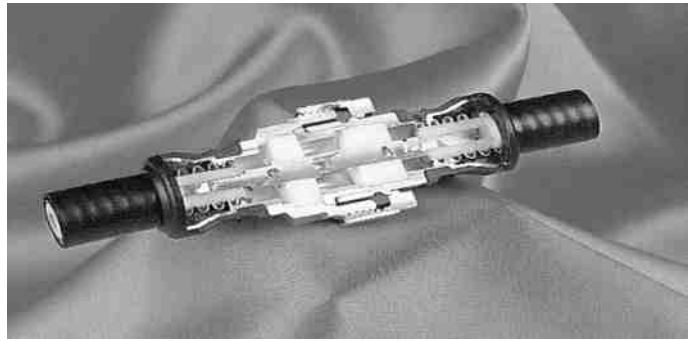

Product Information

Model#	Length	Connector Type
631001-CA	2 meters	7-16 DIN straight male to 7-16 DIN male
631002-CA	3 meters	7-16 DIN straight male to 7-16 DIN male
631003-CA	2 meters	7-16 right angle DIN male to 7-16 right angle DIN male
631004-CA	3 meters	7-16 right angle DIN male to 7-16 right angle DIN male
631005-CA	2 meters	7-16 DIN straight male to straight Type N male
631006-CA	3 meters	7-16 DIN straight male to straight Type N male

Technical Data

Impedance	50 Ohm		
Intermodulation	-155 dBc (IM-product 3rd Order, 2x43 dBm /20 W max.)		
VSWR:		at 900 MHz	at 1900 MHz
Jumper cable assembly with 2 straight connectors		≤ 1.07	≤ 1.08
Jumper cable assembly with 1 straight and 1 right angle connector		≤ 1.08	≤ 1.10
Jumper cable assembly with 2 right angle connectors		≤ 1.08	≤ 1.12
LOSS:			
2 Meter with connectors		= .218 dB	= .318 dB
3 Meter with connectors		= .324 dB	= .474 dB